

EPA TIER
2CARB TIER
3

INDUSTRIAL GASOLINE/LPG/NATURAL GAS ENGINE

KUBOTA WG SERIES (4-cylinder)

WG1605-G/L/N-E3

RATED POWER


- 42.5kW@3600rpm(GASOLINE)
- 41.0kW@3600rpm(LPG)
- 38.4kW@3600rpm(NATURAL GAS)



This engine models is also available with Dual Fuel / Multiple Fuel.

Dual Fuel Version Shown.

PERFORMANCE CURVES

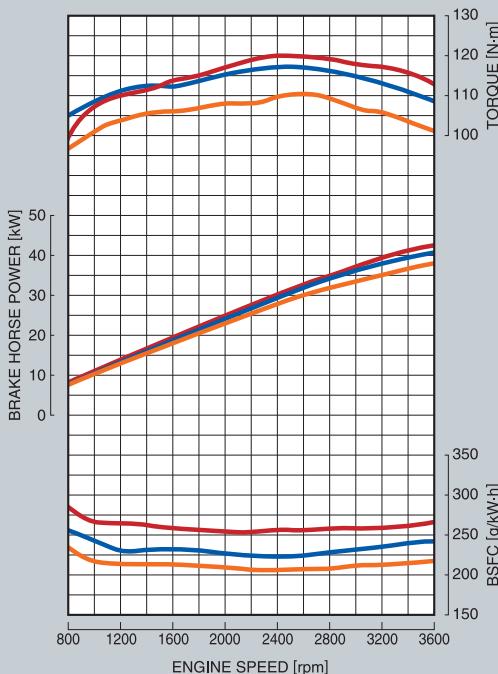

FEATURES and BENEFITS

EMISII

Motorul WG1605-G/L/N-E3 a fost conceput pentru a indeplini cele mai stricte reglementari de emisii: EPA Tier 2 si CARB Tier 3.

FLEXIBILITATE COMBUSTIBIL

Compatibilitate intre motoarele SI si CI este o solutie buna pentru clientii care au nevoie de flexibilitate cu produsele lor. Oferim urmatoarele variante de combustibil:

- Benzina si LPG
- LPG si gaz natural
- Benzina, LPG si gaz natural

DURABILITATE SI FIABILITATE

Motoarele WG1605 SI au fost realizate dupa Seria 05 CI si au performante asemănătoare în comparație cu motoarele turbo diesel, care sunt renumite la nivel mondial pentru fiabilitate. Noul motor WG1605 este extrem de linistit cu vibratii putine.

KUBOTA WG SERIES WG1605-G/L/N-E3

GENERAL SPECIFICATIONS

Model	WG1605-G-E3	WG1605-L-E3	WG1605-N-E3	
Emission Regulation	EPA Tier 2, CARB Tier 3			
Type	Vertical 4-cycle Liquid Cooled Engine			
	Gasoline use	LPG use	Natural gas use	
Number of Cylinders	4			
Bore	mm (in)	79.0 (3.11)		
Stroke	mm (in)	78.4 (3.09)		
Displacement	L (cu.in)	1.537 (93.79)		
Fuel	Unleaded gasoline	Commercial LPG	Natural gas	
Aspiration	Naturally Aspirated			
Maximum Speed	rpm	3600		
Output: Gross Intermittent SAE J1995	kW	42.5	41.0	38.4
	HP	57.0	55.0	51.5
	ps	57.7	55.7	52.2
Direction of Rotation	Counter clockwise viewed from flywheel side			
Oil pan capacity	L (u.s.gal)	6.0 (1.6)		
Starter Capacity	V-kW	12-1.0		
Alternator Capacity	V-A	12-40		
Length	mm (in)	592 (23.3)		
Width	mm (in)	478.7 (18.9)		
Height	mm (in)	691.8 (27.2)		
Dry Weight	kg (lb)	119 (262.3)	120 (264.6)	120 (264.6)

*Specification is subject to change without notice.

*Dimensions and dry weight are according to Kubota's standard specifications.



Dimensions and weight depend on completed specifications.

*LPG: Commercial liquid propane gas only. Equivalent to propane HD-5 of GPA standards.

*Natural gas: The performance shown is with Japanese standard natural gas.

The lower heating value: 9699 kcal/m³ (1090 BTU/ft³)

DIMENSIONS

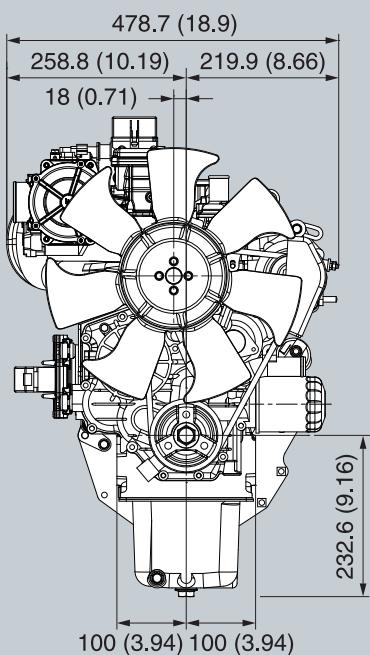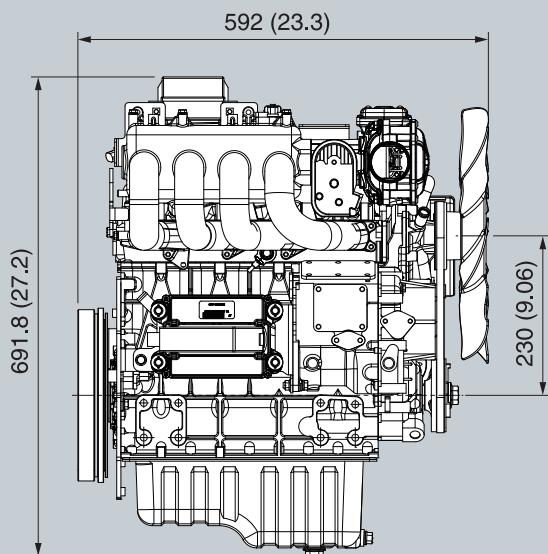

Dual Fuel Version Shown.

Kubota

Mecanexim Engineering

Str. Tudor Arghezi, nr.1, Comuna 1 Decembrie, judetul Ilfov
Telefon: +40 744 671 621

<http://kubota.com.ro>

<http://www.mecanexim.ro/>

0000-01-COM '15.03. .STD